


DUAL TRACE SCOPES



AN/USM-140C OSCILLOSCOPE is a general purpose, high-speed, lab type scope featuring DC to 30 Mhz vertical bandwidth, dual-trace capabilities, and a 5" display. Vertical sensitivity 50 mv to 20 mv/cm. Internal Sweep: 0.1 u-sec/cm to 5 sec/cm in 24 ranges. Sweep Magnification from X1 to X100 in 7 steps. Horizontal bandwidth: Dc to 1 Mhz, 0.1 v/cm to 10 v/cm sensitivity. Input Impedance: 1 megohm shunted by 30 pf. Calibrator 1000 Hz square wave with 1 u-sec rise and decay time; Voltage: 0.2 mv to 100 v. pp. in 18 ranges. With beam finder; MX-2930B dual trace and MX-3078 aux. time base plug-ins included. USM-140C accepts all 162 and 166 Series Hewlett-Packard plug-ins for added versatility. Power required: 115/230 vac 50-440 Hz. Size: 14½x19x22½, Shpg. wt: 100 lb Price: Used, repairable \$375 Checked \$450

AN/USM-105A OSCILLOSCOPE with dual-trace plug-in; same as the USM-140C scope except has vertical bandwidth DC to 15 Mhz; Sensitivity: 20 mv/cm to 20 v/cm. Units have some "pitting" from corrosion on the front. Price: Used, repairable \$300. Checked \$375.

TV-2 TUBE TESTER



TV-2/U DYNAMIC MUTUAL CONDUCTANCE ELECTRONIC TUBE TESTER for portable use. Used to test and measure performance capabilities and to determine rejection limits for electron tubes used in receivers, low-powered transmitters and other electronic equipment. Has provisions for checking tubes up to 9 pins including acorn, noval, 7 pin trans., etc. Meters 2½" for reading filament, grid, plate, screen, signal and transconductance (percent quality) which is 10,000 ohms per volt. All the important tests can be made on this unit and it will also test tubes under the actual operating conditions by setting the proper voltages that are indicated on the meters. Power required: 103 to 125V.; 50 to 1600 cycles. Size 173/4x16½x8½ shpg. wt: 45 lbs. Price: used repairable \$75.00 Chkd \$95.00

TV-2 PARTS: meters, sockets switches, transformers, etc. available. Write your needs.

VOLTMETER-RECEIVER

RYCOM 2174 FREQUENCY SELECTIVE VOLTMETER covers 0 to 420 KHz in 6 bands. Used as low frequency receiver by government. Selective bandwidth: 100 Hz, 3 KHz, 10 KHz. Sensitivity: .0003 v rms @ -70 db to 30 v. rms @ +30 db. With monitor selection for AM, LSB, USB, BFO 1, & BFO 2 signals. Control for balanced or unbalanced line of 135 ohm, 600 ohm, or bridge type. Includes built-in speaker and headphone jack. Power required: 115 vac 60 Hz. Size: 9x19x7 Shpg. wt: 25 lbs. Price: Used, repairable \$95.00 Checked \$125.00




COLLINS RECEIVER




COLLINS 51J-4 RECEIVER, 0.5 to 30.5 Mhz in thirty bands, 1 Mhz per band. With wide 6" linear scale, this unit is tuneable to any AM signal in its range in either megacycles or kilocycles. The 51J-4 features five step crystal selectivity, a calibrated "S" meter, and separate controls for crystal phasing, BFO crystal calibrator, AVC noise limiter, and antenna tuning. Mechanical filters 1,3,6 KHz. Audio Output: 1.5 watts into 4 or 600 ohms. Power required: 115/230 vac 50-60 Hz. Size: 10½x19x13 Shpg. wt: 55 lbs. Price: Used, repairable \$350. Checked \$400.

TRANSISTORIZED SCOPE



TRANSISTORIZED O'SCOPE HFE T4214A, 5 inch oscilloscope has the following controls: Focus, Brightness, Astig, Signal shift, input atten V/DIV, Time T/Div multiplier; x.5, 1, 2; time base defl(ext/int); Free run/single shot. Inputs; sig, ext intensity, TB trigger, TB amp. Uses the following circuit cards: pre-amp, signal deflection amp, time base, intensity mod, sweep amp. Also has provision for signal delay, trigger pick-off, trigger delay, but cards are not available. Power req 115 V 60 Hz OR 12VDC lamp. Uses European transistor and components but nothing appears to be critical. The sweep is from top to bottom but can be changed. Uses 5CLP11 CRT. Voltage on deflection plates, sweep 0 to 20, signal -10 to +10. Freq. response est 300KHz-limited by deflection amp. Condition used repairable, good CRT, no case or power plug, slightly bent frame. 25"Dx17"Wx9"H, wt 44 lbs, shpg wt 60 lbs, Cannot be sent UPS or PP \$75.00

FISH TANK



FISHTANK of ELECTRONIC COMPONENTS, originally part of video tape recorder-player. Consists of demodulator, servo amp, drop-out compensator, pre/post processor, and AC power supply. Hundreds of parts including IC's, FET's, transistors, toroidal coils, capacitors, resistors, etc.

Power supply output: -12 and +12 VDC 1 amp regulated; 5 v. 1 amp unreg. Transformer secondary of 2/20 v. 2 amp and 5v. 2 amp. Size: 14x12x6½ Wt: 15 lbs. Unused, \$19.95

DIGITAL DISPLAY




ID-953 DIGITAL DISPLAY; six Burroughs 8421 (B-5092) NIXIE. Amber-colored

filter; BEZEL marked hours, minutes, seconds. Has two Amphenol 57-40500 connectors (mates not available). With two spare 8421 NIXIE. 3½" h x 4" d for standard rackmount. Price: Unused, \$39.95

TELEPHONE TEST SET

I-142/PTM-6 TELEPHONE TEST SET, designed to measure electrical characteristics of telephone and related equipment. Unit provides the following test circuits:

1. Sound source for microphone and receiver performance;
2. Measuring circuit for electrical output of mics and rec. in efficiency test;
3. Capacitor test for leakage resistance;
4. Generator test;
5. Ringer test;
6. Insulation test;
7. Dial test indicating percent of pulse period;
8. Continuity test;
9. Instrument tests including a 600 ohm circuit for battery and sound-powered phones; a 24v. 361 ohm DC res. 320 ohm AC circuit for common battery phones; a 24 v. 361 ohm DC res. 3 v. 4 ohm DC res. impedance matching circuit of 30, 60, 75, 150, & 300 ohms for carbon mics; and impedance matching of 128, 256, 512, 1024, 5K, & 10K ohms for rec. and magnetic mics. With meter, scales -10 to +6 db and 0 to 100 vdc. Operates from external battery source of 3, 12, 24, & 135 vdc. (Less Batteries) Gray or black face, whichever is available. Size: 19x12x9 Wt: 48 lbs. Used, \$49.50




Fair Radio Sales Co.

1016 E. EUREKA ST.

P. O. BOX 1105

Lima, Ohio 45802

PHONE: 419 / 223-2196




**GOD IS JUST
A PRAYER AWAY**



**RETURN POSTAGE
GUARANTEED**

Bulk Rate
U. S. POSTAGE
PAID
Lima, Ohio
Permit No. 74

**SUPPLEMENT To
CATALOG No. 75**

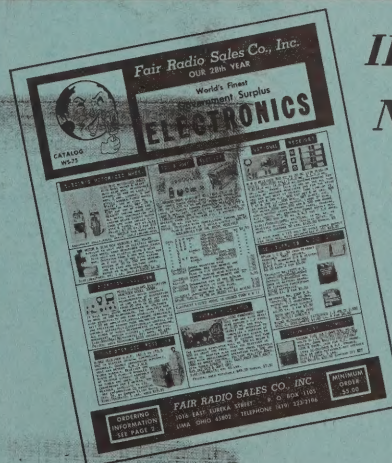

**IF YOU DO
NOT HAVE
CATALOG
NO. 75
SEND
FOR IT
TODAY!**



OSCILLOSCOPE



HEWLETT-PACKARD 150A OSCILLOSCOPE with H-P 152B dual-trace plug-in; General purpose scope has a DC to 10 Mhz vertical bandwidth and a 5" display. Vertical Sensitivity: 50 mv/cm to 50 v/cm. Sweep Time: 0.1 u-sec/cm to 5 sec/cm. Sweep magnification X1, X5, X10, X50, X100. Horizontal Sensitivity: 0.2 v/cm to 5 v/cm. Calibrator 0.2 mv to 100 v. Power required: 115/230 vac 50-440 Hz. Size: 16x14x23 1/2. Shpg. wt: 100 lbs. Price: Used, repairable \$250. Checked \$300.

TEKTRONIX 545A OSCILLOSCOPE

with DC to 30 Mhz vertical bandwidth. Has the versatility offered in the TEK "letter" and "1" series plug-ins, delayed sweep, and a 6 X 10 cm graticule. Vertical characteristics depend upon the plug-in used. Horizontal Sensitivity: 0.1 u-sec/cm to 12 sec/cm (time base A) and 2 u-sec/cm to 1 sec/cm (time base B). Sweep magnification of X5. Delay Range: 2 u-sec to 10 sec/cm. Amplitude Calibrator: 1000 Hz squarewave, 0.2 mv to 100 v. SOLD LESS PLUG-INS. Power required: 115/230 vac 50-60 Hz. Size: 17x13x24, Shpg. wt: 80 lbs. Price: Used, repairable \$500. Checked \$600.



AN/USM-81 OSCILLOSCOPE, similar to Tektronix 535, not Tektronix manufacture. DC to 11 Mhz, two time bases. Accepts TEK and similar "letter" and "1" series plug-ins. Sold less plug-ins. Shpg. wt: 80 lbs. Used, Repairable, \$275. Checked \$350.




TEKTRONIX TYPE OSCILLOSCOPE PLUG-IN UNITS for use with Tektronix 530, 540, 550 series and similar manufacturers' scopes. Sold as "used, repairable-complete." Add \$5.00 for Tektronix mfg. unit. TYPE B Wide band, High gain, \$35. TYPE D High gain DC diff., \$40. TYPE H Wide band, high gain DC preamp, \$45. TEK TYPE G Wide band DC differential, \$45. TEK TYPE P or 84 Sample test, each \$45.

TEKTRONIX MFG.

- 514D DC-10 Mhz, 0.1 u-sec-.01 sec/cm sweep \$150.00
- 513D DC-20MHZ, .01 to 1000 u-sec/cm sweep rate generator \$225.00
- 524AD Television Scope, DC-10 Mhz markers, sweep delay \$250.00
- 532 DC-5 Mhz, 0.2 u-sec to 5 sec/cm sweep, uses "letter" series plug-in (not included) \$225.00
- 541 DC-30 Mhz, 0.2 u-sec to 5 sec/cm sweep, uses "letter" series plug-in (not included) \$350.00
- 570 Electron Tube Curve Tester \$300.00

HUGHES 105A MEMOSCOPE, wideband pre-amp, .1 u-sec to 10 sec/div, \$495.
SIMPSON 458 COLORSCOPE, DC to 4.5 Mhz, Repairable \$75.00, Checked \$125.
DUMONT 401 DC to 500 KHz, 5 u-sec to .25 sec/cm sweep, Checked \$125.




DUMONT 304A OSCILLOSCOPE A general purpose scope that enables rapid, accurate amplitude measurement of any portion of a 0 to 1000 volt signal from DC to 100 KHz, useful to above 300 KHz. Features large 5ADP type cathode ray tube and 100 millivolt full scale vertical sensitivity. Sweep frequency range from 2 to 30,000 Hz. Extra-Low

frequencies possible by attaching external capacitance to terminals. Maximum sweep speed with sweep expansion is one inch per microsecond. Input impedance: 2 megohms paralleled by 50 UUF. Power required: 115/230 VAC 50-400 Hz. 9x13x19 wt: 65 lbs. Price: Used Repairable \$50.00 Checked \$75.00


PROGRAMMED TUBE TEST

HICKOK 123A TUBE TESTER, A SEMI-AUTOMATIC UNIT UTILIZING PUNCH-CODED PROGRAM CARDS TO TEST VACUUM TUBES. UPON PLACING THE APPROPRIATE CODE CARD IN SLOT, A TUBE'S CHARACTERISTICS ARE AUTOMATICALLY ANALYZED AND EVALUATED ON A PANEL METER WITH SCALES: 0-100 AND GOOD-REPLACE (LEAKAGE); REPLACE-GOOD (QUALITY); AND OK-REPLACE (GAS). TEST SOCKETS FOR LOCAL, OKTAL, 4, 5, 6, 7-PIN, NORVAL 9, 7-PIN MINIATURE, SUB-MINIATURE. WITH NO LESS THAN 1600 TEST DATA CODE CARDS. SOLD AS "RECEIVED FROM GOVERNMENT--NOT CHECKED." POWER REQUIRED: 115 VAC 60 Hz. SIZE: 30x14x10 1/2. WT: 100 LBS. USED, NOT CHECKED \$50.00



10 TO 100 MHZ CONVERTER

NORTHEASTERN 14-21C FREQUENCY CONVERTER; 10 TO 100 Mhz COUNTER PLUG-IN EXTENDS FREQUENCY RESPONSE OF NORTHEASTERN 14-20C, FR-38, AND HEWLETT-PACKARD 524-SERIES FREQUENCY COUNTERS. BEIGE; WT: 10 LBS. PRICE: USED, REPAIRABLE \$35.00



SIGNAL GENERATOR




TS-403 SIGNAL GENERATOR, SIMILAR TO HEWLETT-PACKARD 616B; 1.8 to 4.2 Mhz DIRECTLY CALIBRATED. DESIGNED FREQUENCY CALIBRATION -1%. OUTPUT RANGE OF 1 MW OR .223 v. TO 0.1 u-v. INTO 50 OHM LOAD IS DIRECTLY CALIBRATED AND CONTINUOUSLY MONITORED. INTERNAL MODULATION 40 TO 4000 Hz; EXTERNAL PULSE MOD. REQUIREMENTS 40 TO 70 v. POS. OR NEG., WIDTH 1 u-sec TO 2500 u-sec; MAY BE SQUAREWAVE MODULATED. POWER REQUIRED: 115/230 VAC 50-1000 Hz. SIZE: 17x13x13 1/2. WT: 65 LBS. PRICE: USED, REPAIRABLE \$150.00

SIGNALING SYSTEM




DUPLX SIGNALING UNIT DSU-2 AUDIO TONE TRANS. & REC. FOR USE IN THE 2000 TO 7475 HZ CARRIER SYSTEM FOR LAND LINE, POWER LINE OR RADIO SIGNALING. REC. CAN BE ON SAME OR DIFFERENT FREQ. CH. CNT. FRE 2000-3500 @ 100Hz INTERKEYING SPEED 14-21 P-PER-SEC. TRANS. OUTPUT 600 OHM. REC. INPUT 600 OHM. POWER REQ. 105-125V. 50/60Hz, FOR 19" RACK MOUNT. V/TUBES 2/12AU7, 2/6AG5, 1/6AL5, 1/5964 (RELAY) 1/5Y3 ALSO 2 SEPARATE ASSY. LAMP PANEL ASSY. W/BUZZER & VOICE BAND FILTER PANEL. SIZE: 3 1/2x19x8, OTHER UNITS 1 1/2" DEEP. WT: 50LBS HAMMARLUND DSU-2M W/MANUAL UNUSED \$24.95

COLLINS 250 KC I.F.



COLLINS 250 KC I.F. AMPLIFIER WITH MECHANICAL FILTER 250 KC 3.35 KC, 6.7 KC WIDE, 3/5749 & 2/5726 TUBES. P/O 618S SET. SIZE: 4 1/2x6x3 1/2. #5821-505-2602 UNUSED \$9.95

OSCILLATOR




OSCILLATOR AMPLIFIER ASSEMBLY; WITH 1/7268 KLYSTRON AND 2/717A TUBES THAT WERE DESIGNED TO BE USED IN THE 2800-3000 Mhz RANGE WESTERN ELECTRIC ASY. #D-150815 SIZE: 6x5x4; WT: 5 LBS. PRICE: UNUSED \$12.95

MYLAR COMPUTER TAPE 1/2", 1 1/2 MIL, 2400 FT. REEL, IN LOCK TOP BOX FOR DUST FREE STORAGE, MAY BE USED FOR AUDIO OR VIDEO. USED. 3 LBS. URC-AMPEX 838 OR EQUAL \$2.95



T-195 TRANS. ASSY.

VFO-MASTER OSCILLATOR FROM THE T-195 TRANSMITTER; GENERATES FREQUENCY OF 1.5 TO 3 Mhz. HAS 5749 OSCILLATOR TUBE AND 5749 BUFFER-AMP TUBE. WITH 3/16" DIA. SHAFT. 2 1/2x3 1/2x7, WT: 5 LBS. VFO/T-195, REMOVED F/EQUIPMENT, \$7.95




EXCITER STAGE FROM T-195, USED TO AMPLIFY VFO OUTPUT AND SUPPLY DESIRED TRANSMITTING FREQUENCY TO POWER AMP. SLUG TUNED IN RANGES (1.5-3), (3-6), (6-12), AND (12-20) Mhz. WITH TUBES 6AU6, 2/6AK6, AND 5763. SIZE: 4 1/2x3 1/2x8, 12 LBS. EXC/T-195, \$14.95




VARIABLE CAPACITOR, 13.5-77.8 MMF ONE SECTION; 17-99.6 MMF THE OTHER. 0.094" AIR GAP. WITH 3/8" DIA. SHAFT. 5 1/2x1 1/2x3 1/2 OVERALL. C-221/T-195 \$3.95



VARIABLE CAPACITOR, 25-485 MMF ONE SECTION; 23-437 MMF THE OTHER. 0.03" AIR GAP. WITH GEARS 1 1/2" DIA. AND 5/8" DIA. 4 1/2x3 1/2x4 1/2 OVERALL. C-222/T-195 \$4.95



ANTENNA TUNING VARIABLE CAPACITOR, 20 TO 400 MMF, 0.03" AIR GAP. WITH 5/8" x 1/2" DIA. SHAFT. 4x1-5/8 x1 1/2 OVERALL. C-1003/T-195 \$3.95



R-390A R-392 RECEIVERS

R-390A/URR RECEIVER, 0.5 to 32 Mhz read directly on counter type indicator. Wt: 90 lbs Price: Used, repairable \$450. Checked \$600.

R-392 RECEIVER, 0.5 to 32 Mhz read directly on counter type indicator. Requires 24 VDC @ 3 amps. Shpg. wt: 70 lbs. Checked \$195.

R-392 AUDIO MODULE




TRANSISTORIZED AUDIO MODULE FOR USE IN R-392/URR RECEIVER AS THE V-608/26A7GT, PLUGS INTO SOCKET. SM-C-356720 USED CHECKED \$20; REPAIRABLE \$10

VARIABLE CAPACITORS

- 1.5-5 PF, 5 PL. SC. DR. 1X1 1/2x3 1/2 #160-102-2 \$.59
- 2.7-10.8 PF, 20 PLATES BUTTERFLY, SC. DR. OR KNOB, 1 1/2x3 1/2 #160-211 .89
- 2.3-14 PF, 15 PLATES, SC. DR. OR KNOB, 1 1/2x3 1/2 #160-107 .75
- 3-15 PF EA. SEC. DUAL SPLIT STATOR, WITH COIL 6 TURNS, TUNES 150-300 Mhz 1 1/2x2 1/2x3 1/2 #351-1053 1.50
- 3-15 PF EA. SEC. 2 KV. SPLIT STATOR, 11 PL. EA. 3X1 1/2x1 1/2 #SH.#HFD-15X 1.95
- 4-25 PF EA. SEC. 1KV. SPLIT STATOR, 7PL. EA. SEC. 3X1 1/2x1 1/2 #SH.#HFD-25 2.25
- 3-32 PF 28 PL. SC. DR./KNOB SHFT. 3 1/2x1 1/2x3 1/2 #160-130 1.00
- 5-40 MMF 2 KV. 11 PLATES, 2x2 1/2x1 1/2 #4111-8/5910-195-8134 2.95
- 6-50 PF 1 KV. BUTTERFLY, 24 PL. 1 1/2x1 1/2x1 1/2 #SHFT 3/8x3 1/2 #167-203 2.95
- 4.7-55 PF 1 KV. 14 PL. 1 1/2x1 1/2x1 1/2 #SHFT 3/8x1 1/2 #167-161-97 2.95
- 10-100 MMF 1 KV. DUAL SPL. STATOR, 3 1/2x1 1/2x3 1/2 #SHFT 3/8x3 1/2 #5910-186-7224 3.50
- 7-100 MMF 2 KV. 28 PL. 3 1/2x1 1/2x1 1/2 #SHFT 1/4x1/4. #31944 3.95
- 5-150 MMF 500 VDC 38 PL. 2 HOLE MTG. 1 1/2x1 1/2x1 1/2 #SHFT 3/8x3 1/2 #APC140B 1.25
- 15-425 MMF DIFFERENTIAL 500 VDC, DUAL STATOR 30 PL EA. ROTOR 30 PL. 3 1/2x1 1/2x1 1/2 #SHFT 3/8x3 1/2 #149-315-3 4.95

ATTENUATOR



ATTENUATOR SLIDING SCALE TYPE 30 TO 450 Mhz 3" SLIDING ADJUSTMENT, 52 OHM CABLE 20" LG. W/ PL-259 EA. END, ATTENUATOR 10N 30 DB TO 100 DB. #22396-7 USED \$4.95

EQUIPMENT BLOWERS



FASCO DUAL BLOWER 50 C.F.M. 115 VOLT 60 CYCLE .74 AMP. 2800 R.P.M. OUTLETS 2x1-5/8, 1 OUTLET IS PARALLEL TO MTG. BASE OTHER IS AT APPROX. 90° BUT CAN BE MODIFIED AS SHOWN IN ILLUSTRATION, INLETS 2". OVERALL SIZE 7 1/2"x6"x5 1/2"; WT: 10 LB. FASCO TYPE 21 XEROX #127S217 NEW \$10.00




DAYTON BLOWER C.F.M. 115 VOLT 60 CYCLE 1500 R.P.M. 0.7 AMP. INLET 5" OUTLET 3 x 3, OVERALL SIZE 7 1/2"x7"x5; WT: 12 LBS. STK. #9M-439 NEW \$10.95

HEINZE DUAL BLOWER 120 C.F.M. 115 VOLT 60 CYCLE, 3000 R.P.M. .6 AMPS. INLETS 2 1/2" OUTLET 2", OVERALL SIZE 8 1/2"x6"x6; WT: 12 LBS. HEINZE #D60362J52 USED \$8.95

EASTERN AIR DEVICES BLOWER 100 CFM CAPACITOR TYPE MOTOR 120 VOLTS 60 CYCLE, 3300 R.P.M. INTAKE 3" OUTLET 2x2 1/2". OVERALL SIZE 6x6x6 W/MTG. EAD #B7ABL-2DR USED \$12.95



TORRINGTON BLOWER, 200 CFM, 220 VOLT 3000 RPM, (110 V. 1500 RPM 100 CFM) INTAKE 4" OUTLET 2 1/2"x3, OUTLET MTG. 4" DIA. OVERALL SIZE 7x7x7 1/2. 10 LBS. TORRINGTON #A13980 NEW BOXED \$18.95



ORDANANCE BLOWER 6 VOLTS D.C. APPROX 180 C.F.M., TURBINE TYPE IMPELLER, INTAKE 3", OUTLET 1" DIA., OVERALL SIZE 6 1/2"x6 1/2"x4; WT: 7 LBS. ORD. #G486392 NEW \$7.95

EASTERN AIR TWO SPEED BLOWER 2800/3200 R.P.M. CAPACITOR START MOTOR 1/40 H.P. .38 A. 115/230 VOLT 50/60 CYC. MOUNTED ON BASE W/ 4MFD. CAP. TERM. STRIPS ETC. BLOWER APPROX 150 CFM. INTAKE 3" OUTLET 1 1/2"x2 1/2; WT: 12 LBS. SIZE: OVERALL 8 1/2"x11 x 6 1/2. EAD #B74M1-C USED \$12.95



FASCO BLOWER, 200 CFM, 115 VOLTS 60 CYCLES, 2.2 AMPS. 3200 R.P.M. 5" INTAKE, 3x3 1/2" OUTLET, 4 1/2"x4 1/2" FLANG MTG. SIZE: 7 1/2"x7 1/2"x9; WT: 12 LBS. FASCO #50755-J232 UNUSED \$16.95



FAN TYPE BLOWER, 115 VOLT 60 CYCLE, 20 WATT, 4" PLASTIC FAN BLADES, OPEN FRAME NOISELESS MOTOR, MOUNTED IN CADMIUM CASEMENT TYPE FRAME APPROX. 100 CFM. USED SIZE: 13x5x2; 5 LBS. HOWARD #1075-3102 \$3.95

BLOWER FAN TYPE, DUAL UNIT SIMILAR TO ABOVE UNIT, APPROX. 200 CFM. CAN BE RE-MOVED FROM FRAME. USED SIZE: 13x5x2, 8 LB. HOWARD #1075-10-3369 \$7.95

TAPE RECORDER MOTORS

DUAL SPEED OPEN FRAME MOTOR USED WITH RECORDING UNITS, 115 VAC 60 Hz, 2000 & 3000 RPM WITH PULLEY FOR BELTS, PLASTIC FAN BLADE ON OTHER SIDE, 2 1/2" DIA. MOTOR SIZE LESS SHAFTS 2 1/2"x2 1/2" WT: 2 LBS. #TM-594-1 UNUSED \$2.95, 2 FOR \$5.



HEAVY DUTY TAPE RECORDER MOTOR 115 VAC 60 Hz, 1500 RPM. MOTOR SIZE: 3 1/2"x3 1/2"x2 1/2, SHAFT 1 1/2"x5/16" DIA. WT: 5 LBS. STK. #D6-20220 UNUSED, \$5.95

RECORDER MOTOR, 1500 RPM; 115 VAC 60 Hz, DOUBLE END SHAFT, 3/8"x3/16" DIA. & 1/32"x16" W/PULLEY. MOTOR SIZE: 2 1/2"x2 1/2"x2 1/2 WT: 2 LBS. STK. #G140700 UNUSED, \$4.95




RECORDER MOTOR, 1500 RPM; 2" SHAFT IS 3/16" DIA. FOR 1 1/2"; 3/64" DIA. LAST 1/2". 3/8"x3/16" DIA. SHAFT ON OTHER SIDE. MOTOR SIZE: 2 1/2"x2 1/2"x2 1/2 WT: 2 LBS. #602-1 UNUSED, \$4.75

POWER SUPPLIES

SOLA CONSTANT VOLTAGE DC POWER SUPPLIES; 19"x6", SHPG. WT: 40 LBS. UNUSED, \$19.95 EACH


SOLA #	INPUT	OUTPUT
28238	180/240 200/260	200 VDC 1.5 A.
28239	" "	120 VDC 1.1 A.
		20 VDC 2 A.
28245	130/200 240/260	90 VDC 1.5 A.
28270	180/240 200/260	200 VDC 1.0 A.
		100 VDC 500 MA
28272	115/208/230	200 VDC 200 MA

SOLA #28356; INPUT: 115/208/230 VAC. OUTPUT: 300 VDC 300 MA AND 35 VDC 1.5 A. \$29.95




PP-523/GRC POWER SUPPLY, SELECTABLE OUTPUT IN SIX STEPS FROM 34 VDC @ 3 AMPS TO 50 VDC @ 4 1/2 AMPS. INPUT: 115 VAC 60 Hz. WITH TWO 2 1/2" RD. METERS 0-100 VDC AND 0-5 AMPS DC SIZE: 9x11x16, 50 LBS. USED, \$32.95

CCC-20409 POWER SUPPLY; INPUT: 115 VAC 60 Hz. OUTPUT: 12 VDC @ 300 MA. (OUTPUT FROM TRANSFORMER: 14 VDC @ 1.5 AMPS.) IN ALUMINUM CASE. SIZE: 8x11 1/2"x8, WT: 20 LBS. UNUSED, \$12.95



TELETYPE POWER SUPPLY FOR #19 SET. INPUT 105-125 V. 50/60 Hz, OUTPUT 120 VDC 0.6 AMP. W/8 SEC. TAPS. SELENIUM DISC. RECTIFIERS. SIZE: 20 1/2"x8x9; 75 LBS. #4TREC-13 USED \$14.95

TRANSISTORIZED



TRANSISTORIZED-REGULATED P.S. INPUT: 105-125 VAC 50/60 Hz. MOUNTED ON CIRCUIT BOARD, 4 1/2"x5, WT: 3 LBS. UNUSED, #CD5N1.5 5 VDC 1.5 A. \$18. #CD12N.85 12 VDC .85 A. \$20.

THUNDER POWER SUPPLY, OUTPUT: 3.7 VDC 750 MA. VOLT. REG. INPUT 115 V. 60 Hz. HOUSED IN CASE. 3 1/2"x5x3; WT: 5 LBS. #S3.7-750 UNUSED, \$15.00

RECTI CHARGER



RECTI CHARGER BY RAYTHEON, A BATTERY CHARGER FOR TELEPHONE SWITCHBOARD USE. SUPPLIES CURRENT AT A CONSTANT VOLTAGE WITHIN ITS RANGE AND ALSO CHARGES A STORAGE BATTERY ACROSS THE LOAD. INPUT: 95-130 VAC 50/60 Hz.

#1070D	22-24 CELLS RATED AT 6.0 AMPS
	24x29x12, WT: 280 LBS. \$30.00
#6860	22-24 CELLS RATED AT 3.0 AMPS
	20x19 1/2"x9 1/2, WT: 231 LBS. \$20.00
#50C12	22-24 CELLS RATED AT 12.0 AMPS
	28x17x15 1/2, WT: 320 LBS. \$40.00

AC MOTOR 1/3 H.P.




MOTOR 1/3 H.P. 115 VOLT 60 CYC/ HZ, 1725 R.P.M., 1 PHASE, CONTINUOUS DUTY, SELF OILING BEARINGS SHAFT END BOLT MOUNTING 4" CENTERS, SHAFT 1/2"x1 1/2" ONE SIDE FLAT. MADE FOR USE ON WASHING MACHINES, CAN BE USED FOR MANY OTHER APPLICATIONS.

SIZE: 6 1/2"x6 1/2" LESS SHAFT SIZE. SHPG. WT: 17 LBS. URC #ER697S OR EQUAL UNUSED \$10.00
SAME AS ABOVE ONLY 110 HZ 50 CYC \$10.00
" " " " 220 HZ 50 " \$12.00
SAME, ONLY 220V/50HZ 1425/960 RPM. \$18.00

A.C. LINE REGULATOR

WANLESS VARAX AC LINE REGULATOR; INPUT: 102-125 VAC 60 Hz. OUTPUT: 120 VAC WITH LO-HI SWITCH FOR 400 OR 1500 WATT LOAD CHANGE. DC OUTPUT: 24 VDC @ 1.8 A. UNIT IS CAPABLE OF NO LOAD TO FULL LOAD REGULATION WITH B1-1500 INDUCTOR (NOT AVAILABLE.) SIZE: 11x5x11, 43 LBS. MODEL C223, NEW \$69.50




MOTOR CONTROL

VARIABLE SPEED DRIVE CONTROL USED WITH MOTOR AM No. E-85-132. GE #3S750RJ750A1, FIELD 100 VDC ARM., 140 VDC., 2.6 A INPUT 230 V. 50/60 Hz. 5 LBS. GE #3S7505RJ750A1 NEW \$25.00




P.M. MOTORS

28 VOLT MOTOR, 135 RPM; HP: 1 OZ./IN. WITH 5/16"x1/2" DIA. GEARED SHAFT; HAS 4 SOLDER TERMINALS ON 1x1 1/2"x8 BLOCK. MOTOR SIZE: 5x1-7/8 DIA. WT: 1 LB. GE #5BA10FJ444 USED, \$7.95



WESTERN GEAR 24 VOLT MOTOR, 250 RPM, 45 OZ./IN. WITH 5/8" DIA. GEARHEAD. 1 1/2" SQ. MTG. FLANGE FOR VERTICAL MOUNT. SIZE: 3 1/2"x1 1/2 DIA. 1 LB. #P5B24R3 \$7.95

CONTROL PANEL



RM-23 CONTROL PANEL, USED TO CONNECT THE OUTPUT OF 6 RECEIVERS TO ANY 5 INTERCOM CHANNELS BY USE OF PATCH CORDS, ALSO THE INTERCOM CHAN. CAN BE PATCHED. HAS 5 INTERCOM PUSH SW. W/LITES, INTERCOM SPEAK SW., 5 SETS PATCHING JACKS, 5 POS. CHAN. SELECTOR SW. 6 REC. JACKS, 6 RELAYS, PHONE & MIC. JACKS ETC., SCHEMATIC WITH UNIT. FOR RACK MTG. 19"x7"; WT: 17 LBS. USED \$20.00

MICROPHONES




MICROPHONE. MICROPHONE DYNAMIC TYPE. CRYSTAL TYPE 6' CORD, STD. W/32" 3 COND. PLUG, PUSH SW. SHIELDED CORD PULL-OUT HOL. ON-OFF SW. NO DER, 3x1 1/2"x1 1/2. PLUG, 2 1/2"x1 1/2"x2 1/2. WEBCOR 395. HERALD M-63A NEW \$3.95. NEW \$1.95




MICROPHONE, SINGLE BUTTON CARBON, HAND HELD TYPE WITH PUSH TO TALK SW. 4 FT. CABLE WITH AMPHENOL 3 WAY PLUG, ALUMINUM CONSTRUCTION. P/O RC-263/SK8-226 NEW \$7.95

AM-FM TUNER

AM-FM TRANSISTORIZED TUNER, 5 TRANSISTOR 4-DIODES WITH AVC AND AFC. CONSISTS OF RF OSCILLATOR, IF DETECTOR STAGES. REQUIRES 9 VDC. NOT GUARANTEED OPERABLE. UNUSED WITH SCHEMATIC AND HOOKUP DIAGRAM. 4 1/2"x3 1/2"x1 1/2 BC-CD-34 TUNER \$2.50 EACH



TRANSISTORS HEAT SINKS




FOUNDATION FOR 12 VDC 20 AMP POWER SUPPLY; CONTAINS SIX MOTOROLA POWER TRANSISTORS 108/6402 MOUNTED ON ALUMINUM HEAT SINKS. WITH 15 VDC 8000 MFD. CAPACITOR, A 20 AMP CIRCUIT BREAKER, A 9 LINE TERM. STRIP, WIRE WOUND RESISTORS, ETC. MOUNTED ON FRAME 6x6x8, WT: 10 LBS. LESS TRANSFORMER. IBM #ASM-730470 REMOVED-USED, \$7.95

SAME AS ABOVE, BUT WITH EIGHT TRANSISTORS AND HEAT SINKS, 12 V. 26 A. #ASM-730-480, \$9.95

HEAT SINKS ONLY, AS USED IN THE ABOVE, 5x2 1/2"x1 1/2, #HS-8/UR 55¢ EACH; TWO FOR \$1.00

WAKEFIELD HEAVY DUTY HEAT SINK HAS 8 INDIVIDUALLY INSULATED SINKS, 4 EA. (1 1/2"x3) AND 4 EA. (2 1/2"x3). TAPPED TO MOUNT TRANSISTOR STUDS. PROVISIONS FOR MOUNTING MUFFIN FAN FOR COOLING. ANODIZED ALUMINUM. SIZE: 5 1/2"x4 1/2"x4 1/2. WT: 4 LBS. #FCA-800 PRICE: \$3.95; THREE IN CRATE, \$10.00 UNUSED.




MINIMUM ORDER \$5.00

DOLLAR DAZE

- 1 NEW MOTOROLA MRTL DIP 1C's. MC 723, 724 725, 789, 799, 792 MIXED 9/ \$2.00
- OPCOA LED .33in. SLA-1 0-9 w/DECIMAL OR SLA-2 PLUS, MINUS, ONE. CHOICE 6/ \$5.00 2
- 3 TRIPLET AC ADAPTER 5.8VDC 310MA WHEN USED WITH EXTERNAL CAPACITOR(NA)3/\$5.00
- PRINTED CIRCUIT BOARDS w/1.c., DIODES, TRANSISTORS, CAPS., SM. PTS. ETC.3/4LB \$5 4
- 5 TRANSISTOR CIRCUIT BOARDS w/TRANSISTORS DIODES, RES., CAP., SM. PTS. ETC 4 LB \$5
- CIRCUIT BOARDS, WIRED TYPE, w/LG. LEADS, RES., CAPS., POTS., SOC., ETC. 20 LBS \$5 6
- 7 SOLDER, ROSIN-FILLED 63/37 ALLOY .050 DIA. 3 OZ. \$1.00
- MINI-BOX; 2 PC. 6x4x3, w/HOLES FOR SLIDE SW, 2/5-16, 1/2, 3/3-16 & 7/7-8 HOLES \$1.00 8
- 9 REC-TRANS CHASSIS; SOLID STATE FOR USE IN BROADCAST BAND, 2 1/2x6x1, NO/CASE \$2.00
- SENTRY ALARM; BUZZES WHEN PIN IS PULLED SIZE 2 1/2x3x1 1/2, REQ. 9 VOLT BATT. \$1.00 10
- 11 CLEAR PLASTIC 1/4" PLASTIC TAPE REEL 7" 2 FOR \$1.00
- PLASTIC MITTENS 12 PAIR \$1.00 12
- 13 TOGGLE SWITCHES; SPST, CUT-OFFS 5/\$1.00
- PUSH SWITCHES; SPST, NORM/OPEN 5/\$1. 14
- 15 PUSH SWITCHES; SPST, NORM/CLOSED 5/\$1.
- SLIDE SWITCHES; 2PST & IPDT 5/\$1. 16
- 17 CONTROL BOX; w/SWITCHES 1EA. DPDT, DPST, SPST ALSO 3 PILOT LITES w/BULBS \$1.00
- FELT FOOT MOUNTING; 3/4" DIA. FT. MTG. STUD 1" LG. 8/32 THREAD 12 FOR \$1.00 18
- 19 FELT FOOT MOUNTING; DIAMOND SHAPE ROUND ELD CORNERS, 1 1/2x1 1/2, 8/32 HOLE 12 FOR \$1.00
- CORD EXT. 7 COND. 15 FT. MATCHING MALE & FEMALE EA. END. \$3. 20
- 21 CORD; 5 COND. 20' LG. 5 PRONG PL. ONE END (MIGHT BE FOR B&H SLIDE PROJECTOR) \$1.
- COILED CORD 2 CONDUCTOR; 50" RETRACTED, 10' STRETCHED, NO PLUGS. \$2.00 22
- 23 CABLE; 4 COND. FLAT WITH SWITCH AS USED ON ELECT. BLANKET, 25' LG. \$3.00
- CORD; 2 PHONE PL. 3 COND. COM. HOLDER 1" CNT. 15' CABLE, 4 COND. 1PR. SHIELD. \$2. 24
- 25 LINE CORD; WITH RETRACTABLE GND. PRONG, 7' LG. RUBBER COVER. (GOV'T SURPLUS) \$1.
- CORD; RETRACTABLE GND. AC PLUG ON END, HEAVY DUTY COILED 18" LG. 3 COND. \$2. 26
- 27 LINE CORD; STANDARD, MOULDED PLUG, 6' TINNED ENDS, 2 COND. # 18 3 FOR \$1.00
- PHONE PLUG 3 CONDUCTOR, ON 24" COILED CORD RETRACTED, 48" STRETCHED. \$1.00 28
- 29 NON-SKID RUBBER TURNTABLE MATS, 11 1/2" DIA. 1 1/2" CENTER HOLE. 2 FOR \$1.00
- MIXED HARDWARE, SCREWS, NUTS WASHERS ETC. REMOVED FROM EQUIP. ALL USEABLE 5LBS \$1 30
- PLEASE ORDER BY NUMBER; ITEMS CAN NOT BE PURCHASED IN QUANTITIES LESS THAN INDICATED.

MULTIMETERS



MULTIMETERS, MERCURY AND JACKSON MANUFACTURE. MOUNT IN 2 1/2" DIA. HOLE. OTHER SIZES AND SCALES AVAILABLE, BUT NOT LISTED. WRITE YOUR NEEDS.

MERCURY 1700, FS=200 U.A. SCALES: OHMS; 0 TO 15-50 VOLTS AC-DC; 0 TO 40-140 V. P-P.; 0 TO 1.5-5.0 VAC; -20 TO +5 DB AND -10 TO +15 DB. SIZE: 6" W X 4 1/2" H. \$9.95

MERCURY 1800, FS=50 U.A. 20K OHM/VOLT DC AND 5K OHM/VOLT AC. SCALES: OHMS; 0 TO 10-50-250 DC V-AMPS; 0 TO 2.5-10 VAC; -20 TO +10 DB. SIZE: 6" W X 4 1/2" H. \$9.95

MERCURY 301, FS=50 U.A. SCALES: OHMS; 0 TO 15-75-300 VOLTS AC-DC; BAD-WEAK-GOOD RECEIVING TUBES; BAD-REACTIVATE-GOOD CRT; .001 TO .5 MFD. AND .1 TO 80 MFD. CAP. 6x4 1/2, \$9.95

JACKSON, FS=200 U.A. SCALES: OHMS; 0 TO 1.5-5.0 VDC OR V. RMS.; 0 TO 40-140 V. P-P.; 0 TO 5.0-14 V. RMS OR P-P.; 0 TO 1.5-4 2 V. RMS OR P-P. SIZE: 6-7/8" W X 5" H. \$10.95

TUBE TEST METERS



TUBE TESTER METERS, MERCURY MANUFACTURE. VARIOUS OTHER SIZES AND SCALES AVAILABLE, BUT NOT LISTED. WRITE YOUR NEEDS.

MERCURY, FS=5 MA. SCALES: REPLACE-WEAK-GOOD AND 0 TO 100. 7x5 1/2, MOUNTS IN 2 1/2" HOLE. \$7.95

MERCURY, FS=1 MA. SCALE: 0 TO 100 AND BAD-WEAK-GOOD. 3-3/8x3, MOUNTS IN 2 1/2" HOLE. \$5.95


MERCURY 990, FS=1 MA. SCALE: 0 TO 100 AND BAD ?-GOOD. 2 1/2x2 1/2, MOUNTS IN 2" HOLE. \$4.95

MERCURY 1000, FS=1 MA. SCALES: 0 TO 5K-25K GM; BAD-WEAK-GOOD; OK-BAD GAS. SIZE: 4 1/2x4-1/8, MOUNTS IN 2 1/2" HOLE. \$6.95


MERCURY 2000, FS=1 MA. SCALES: 0 TO 5K-25K GM; BAD-WEAK-GOOD EM; 0 TO 200 BETA TRANSISTOR GAIN; OK-BAD GAS. 4 1/2x4-1/8, 2 1/2" MT. \$8.95

COPY LENS

EDNALITE COPY LENS WITH 8" FOCAL LENGTH, F5.6 APERTURE. COATED LENS HAS FOUR ELEMENTS. MAGNIFIES APPROX. 3X; GREAT FOR OPTICAL EXPERIMENTS ETC. MADE IN U.S.A. 2" DIA. X 2 1/2". EDNALITE #245, UNUSED \$3.95



STEPPING SWITCH



STEPPING SWITCH WITH ELECTRIC RESET, 115 VOLT 60 CYC., CAN BE MODIFIED FOR 17 CONTACTS OR LESS. MOUNTED ON PLATE 4 1/2 X 3 1/2, 2 1/2 HIGH. WT: 1 1/2 LBS. MILLER#1095288 NEW \$4.95

RELAYS

RELAYS, POTTER-BRUMFIELD MFG. KR-5736, SPDT, 115 VAC 60 HZ, WITH OCTAL BASE. \$2.95
KR-5737, DPDT, 115 VAC 60 HZ, WITH OCTAL BASE. \$3.50
KH-4695, 115 VAC 60 HZ, 1/10 HP, 3 AMP 28 VDC RES. WITH SOLDER TERMINALS. \$2.95
KH-4703, 24 VDC 3 AMP, 1/10 HP; 115 V. & 28 VDC 3 AMP RES. SOLDER TERM. \$2.95



READ-OUT


TELEREGISTER READ-OUT, 1M-PULSE COUNTER RACHET TYPE, NUMBERED 0-1-2-3-4-5-6-7-8-9. 1" HIGH NUMERALS ON ROTARY DRUM OPERATES FR 12 VDC WITH RESET. UN1 MAY BE GANGED. NUMERALS YELLOW OR WHITE (NO CHOICE) ON BLACK BACKGROUND. SIZE: 3 1/2x1 1/2x1 1/2; WT: 1 1/2 LBS. TELEREGISTER K-1, \$1.00 EA., SIX FOR \$5.00



GRAB BOX ASSORTMENT OF NEW & USED, USEABLE ELECTRONIC ITEMS. SUCH AS PARTS, ASSEMBLIES, RESISTORS, CONDENSERS, TRANSFORMERS, CHOKES, COILS, CONTROL BOXES, CIRCUIT BOARDS, CHASSIS, MOTORS ETC. SOME OF THESE ITEMS MAY BE ON OR OFF THE ASSEMBLIES. PACKED IN CARTON AND THE WEIGHT WILL BE AT LEAST 50 LBS. A GOOD FILLER WHEN YOU ARE BUYING OTHER ITEMS AND YOU DO NOT HAVE ENOUGH WEIGHT TO MAKE THE MINIMUM MOTOR FREIGHT CHARGE OF 150 POUNDS. GRAB BOX NO.75 50 LBS. \$6.00 100 LBS. \$10.00

TIMER BONANZA

TIMER CONTROL P/O VIDEO TAPE SYSTEM, TIMER MOTOR 115V 50-60 HZ w/SPDT CONTACTS UP TO 8 HOUR DELAY. 18v200 MA TRANSFORMER, CIRCUIT CARD WITH RECT, CAPS, TRANSISTOR SPST RELAY, SLIDE SWITCHES 4PDT CENTER OFF, SPDT, MICRO SWITCH SPST. 3LBS. \$3.95



EQUIPMENT CABINET

CY-3704 CABINET, PICTURED, WITH REAR DOORS, FULL PULL OUT TABLE, TOP SEC. 19x11x21, MID. 19x11x21 1/4, BOT. 19x24x24, 3 PANELS 4" 7 & 14, OVERALL SIZE 40x54x24 1/2 ALUMINUM. Bx. WT: 390LBS N \$126.

AVCO#4834 (RIGHT), 19" RACK MTG. TABLE OPENING 18x19, TABLE 10x20, LOWER PANEL OPENING 20"hx21"D. 100LBS. \$50

OTHER CABINETS AVAILABLE, WRITE. TABLE TOP CABINET FOR 19" PANEL, 21wx14hx15d TAKES 12H PANEL, BLK. ST. NEW #URC1415 \$15
SIZE: 14dx22wx16 1/2 H. PANEL 14x19 #MEN1416 N. \$20
FLOOR TYPE 37hx21wx15d, w/HINGED REAR DOOR NOT MAILABLE OR UPS NEW #URC3715 \$30

TRANSFORMERS

SEC: 300 v. 500 MA. 2/6.3 v. 1 A. SIZE: 3 1/2x4 1/2x4 1/2; 10 LBS. URC#T127J550-1 \$4.95	SEC: 175 VCT 100 MA. 75VCT 200 MA. 80 VCT 100 MA. & 5 v. 200 MA. SIZE: 3x2 1/2x2 1/2; 2 LBS. URC#720660-1 \$2.95
SEC: 300 v. 300 MA. 6.3v 4A & 6.3v 1A. SIZE: 3 1/2x4 1/2x4 1/2; 10 LBS. URC#X5156821 \$3.95	SEC: 60 VCT 1 A. 6.3 v. 100 MA. SIZE: 3 1/2x2 1/2x2 1/2; 2 LBS. URC#55-28224-1 \$2.95
SEC: 125 v. 500 MA. 6.4 v. 3 A. SIZE: 3 1/2x3 1/2x3 1/2; 5 LBS. URC#46070-16 \$4.95	SEC: 40 VCT 1 A. SIZE: 3 1/2x1 1/2x2; 1 1/2 LBS. URC#56000 \$2.95
SEC: 200 v. 500 MA. SIZE: 3 1/2x3 1/2x3 1/2; 10 LB. URC#K508053491 \$3.95	SEC: 24 VCT 1 A. SIZE: 3 1/2x1 1/2x2; 1 1/2 LB. URC#46070-11 \$2.95
SEC: 450 VCT 250 MA. 40 VCT 1 A. 2/6V 1A. SIZE: 3 1/2x3 1/2x4 1/2; 9 LBS. URC#702-704-00 \$6.95	SEC: 30 VCT 200 MA. 45 VCT 100 MA./2.5v30MA SIZE: 2 1/2x1 1/2x2; 1 LB. URC#374501-1 \$2.95
SEC: 50v@100ma/3v@100 MA/40v@1.5A/40v@200MA SIZE: 2 1/2x2 1/2x2 1/2; 2 1/2 LB. URC#372993-1 \$3.95	SEC: 26 V. 21 A. SIZE: 8 1/2x5 1/2x4 1/2; 12 LBS TROY 60328 \$14.95
PRI: 200/220/240V. 60HZ SEC: 1400 VCT 350 MA. SIZE: 5 1/2x5 1/2x6 1/2; 26 LBS URC/CS5566 \$9.95	SEC: 24 VCT 10 A. SIZE: 3 1/2x4 1/2x3 1/2; 8 LBS. JIMH#246279 \$9.95
PRI: 115/230 V. 60 HZ. SEC: 1600 VCT 230 MA. TAPPED 750 v. 40 MA. SIZE: 4 1/2x6 1/2x6; 18 LBS. URC/89G2660 \$9.95	PRI: 115 V. 50/60 HZ. SEC: 115 V. 1 KVA. 6x6 1/2x7; 20 LBS. AVCO#H-9878 \$18.95

TOY TRAIN TRANSFORMER

GILBERT AMERICAN FLYER TOY TRANSFORMER, INPUT: 120 VAC 60 HZ. OUTPUT: 7 TO 18 VOLTS AC. CONTROL READS 0 TO 120 MPH. WITH AC CORD AND OUTPUT BINDING POSTS. SIZE: 3 1/2x5x3 WT: 6 LBS. GILBERT #22034 USED, \$3.95



MINIMUM ORDER \$5.00